

**DD****DELUXE DIPPING CABINET****KEY FEATURES**

- Sliding glass service doors
- Storage door in back
- Illuminated front panel
- Gelato racks or three-gallon tub racks included
- Internal LED and casters standard
- 12.75-foot cord / 9.75-foot accessible cord
- Environmentally friendly R-290 refrigerant
- Temperature range of -15°F to +15°F

**ADVANTAGES**

- Curved glass front improves product visibility at the counter
- Four widths cover 4 to 10 displayed three-gallon tubs
- Back storage door supports faster restocking during service
- Integrated lighting helps merchandize product at the counter
- Freestanding cabinet with casters simplifies placement

**DD-8****DOE
LISTED**Complies with 2017 DOE standards
for commercial ice cream freezer

DD

DELUXE DIPPING CABINET

SPECIFICATIONS

Model	DD-4	DD-6	DD-8	DD-10
Cubic Feet	6.0	8.5	10.9	15.2
Approx. Weight (Net)	181 lb (82 kg)	240 lb (109 kg)	271 lb (123 kg)	335 lb (152 kg)
Approx. Weight (Shipping)	238 lb (108 kg)	304 lb (138 kg)	357 lb (162 kg)	439 lb (199 kg)
Running Amps	1.3	1.4	2	4.1
Compressor HP	1/7	1/5	1/4	1/2
3-Gal. Tubs Displayed/Storage	4 / 2	6 / 4	8 / 6	10 / 10
5-Liter Pans Displayed/Storage	4 / 6	6 / 10	9 / 14	12 / 20
Container Quantity	47	39	31	23

NEMA 5-15P





115 / 60 / 1

PRODUCT INFORMATION



Click or scan QR to access spec sheets and technical information

DD SERIES

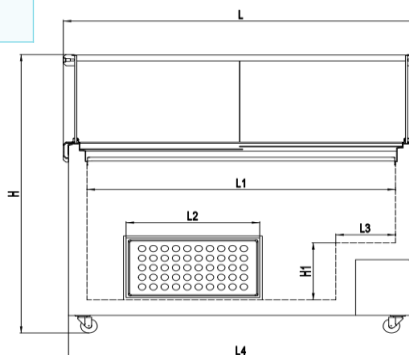

AVAILABLE OPTIONS

- Illuminated front graphics
- Custom color plastic (container orders only)
- Dipper well

Model	L	L1	L2	L3	L4	H	H1	H2
DD-4	32 7/8"	25 7/8"	12 5/8"	8 1/2"	31 3/8"	49"	9 7/8"	23 5/8"
DD-6	42 1/2"	35 3/8"	20"	8 1/2"	41"	50"	9 7/8"	23 5/8"
DD-8	53 1/8"	46"	20"	8 7/8"	51 5/8"	50"	10"	25 1/8"
DD-10	67 5/8"	60 5/8"	20"	8 1/2"	66 1/8"	50"	9 7/8"	23 5/8"

NOTE: Dimensions are in inches.

NOTE: Dimensions are all nominal lengths, use final spec sheet for exact data and model availability.

NOTE: Shipping weight does not include weight of pallets when needed.

NOTE: These merchandisers are designed for use in stores where temperature and humidity do not exceed listed operating conditions.

NOTE: We reserve the right to change specifications and product design without notice

